

FINISHING



FINO 07

Colour	Packaging	Consumption
White	25 KG	3.7kg/m ² for 3mm thickness

DESCRIPTION

Cement-based product for interior walls and ceilings with a fine final texture. Suitable for all types of cement lime based substrates that do not have high flexibility characteristics.

FIELD OF APPLICATION


On all types of cement lime-based substrates. Suitable for substrates with traditional filling and with pre mixed mortars. Two coat layer for the smoothing of interior walls and ceilings. Characterized by very good workability and optimal drying time.

SUBSTRATE PREPARATION

The substrate must be clean, free of dust, oils, or residues that could hinder the bond between layers. Cleaning of the substrate should be done mechanically or manually. Substrates with high absorbency must be moistened beforehand prior to product application.


APPLICATION

Mix 6–6.5 liters of water with one 25 kg bag of Fino 07 in a clean container using an electric mixer, until a homogeneous, lump-free mass is obtained. Let the product rest for 10 minutes, then mix again before use. Apply the product with a trowel and level it to a thickness of 3 mm. After 10–15 minutes, rub the surface with a sponge float until the grain texture appears. The application temperature should be as optimal as possible.

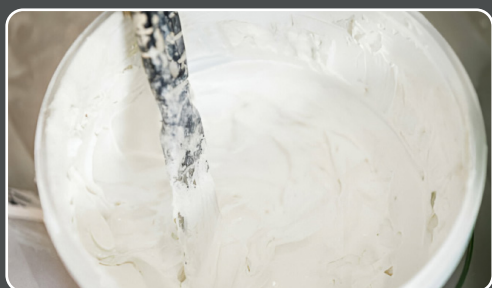

TECHNICAL DATA

Appearance: Powder	Flexural strength: 0.6 N/mm ²
Packaging: Paper bag 25 kg on pallets of 1350 kg.	pH of mixture: 13
Colour: White	Reaction to fire: Class A1
Granulation: 1, 1.5, 2, 3 mm	Water Absorption: W1
Storage time: 12 months from the production date	Grafiato 1 mm, full texture: 12 m ² /bag
Application thickness: Maximum size of the largest granule.	Grafiato 1.5 mm, full texture: 8-9 m ² /bag
Water for mixture: 6 liters of water for 25 kg bag	Grafiato 2 mm, full texture: 7.5-8 m ² /bag
Application Temperature: +5°C to +35°C	Grafiato 3 mm, full texture: 6.5-7 m ² /bag
Compressive strength: 5.1 N/mm ²	Thermal conductivity: 0.52 W/mK

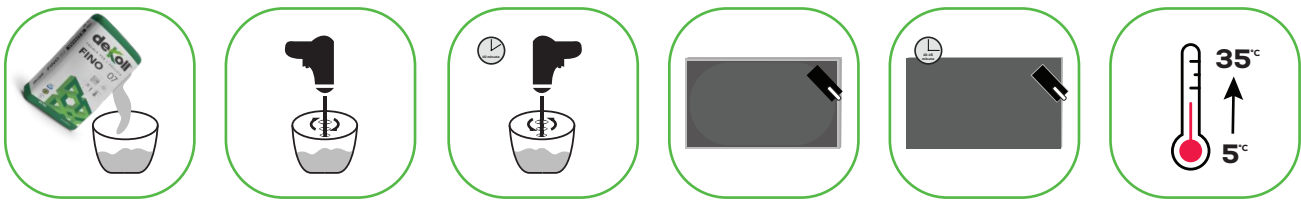

WARNING! Application of Fino is not recommended on supports with high flexibility such as Kapot systems or other flexible products, on unstable surfaces, or on large unevenness. Both low and high temperatures can alter the working characteristics of the product (slowing down or speeding up the drying process). Do not use on:

- Wooden, metal, PVC supports or other surfaces not based on cement.
- Environments with continuous moisture.
- Supports characterized by unstable vibrations.
- High or low temperatures, or strong wind.