

# PRIMERS



## BETON PRIMER

Colour	Packaging	Consumption
Reddish	Bucket 5, 10, 20 Kg	4-5 m <sup>2</sup> /liters

### DESCRIPTION

A multifunctional primer, ready to use, for interior and exterior floors and walls. It is a solvent free and low odor primer, made from acrylic resin dispersed in water and aggregates, offering excellent adhesion strength, water resistance, and aging durability. It provides a rough surface, ideal for plasters, leveling compounds, and cement adhesives, ensuring excellent adhesion on smooth and low-absorption substrates. Once dried, it ensures strong bonding for all types of plasters, leveling compounds, and cement adhesives on various substrates: concrete, brick, stone, drywall, wood, ceramic, plaster, and is an excellent adhesive for tile on tile applications.

### TECHNICAL CHARACTERISTICS


- It is a liquid material based on acrylic resin, used for leveling ceramic tiles and leveling layers on non-absorbent surfaces.
- Provides very good bonding between concrete and filling layers such as mortar, grout, stucco, waterproofing, etc.
- Using this material eliminates the need to spray cement on smooth concrete surfaces.
- Treating the substrate with BETON PRIMER ensures very good workability and easy application of subsequent layers.
- It evens out the absorption rate of the substrate where it will be applied.

### APPLICATION FIELD

It is used for treating smooth concrete surfaces that will later be filled with mortar, grout, etc. It acts as a sealer to fix surfaces that will be painted or filled with mortar, grout, etc. The substrate where BETON PRIMER will be applied must be clean, dry, free of dust, oils, residues, varnish, or anti-adhesion materials. Cleaning of the substrate should be done manually or mechanically.

### FIELD OF APPLICATION

The product should be mixed by hand in the bucket and after that, it is ready for use. If necessary, dilute the product with 10% water. Apply the product evenly with a brush or roller, covering the entire surface. Wait at least 12 hours for BETON PRIMER to dry, depending on temperature conditions, before applying the next product layer on the substrate. Low temperatures and the presence of moisture can significantly increase drying time. Do not apply when the substrate temperature is below +8°C and ensure that it does not get wet within 24 hours after application.

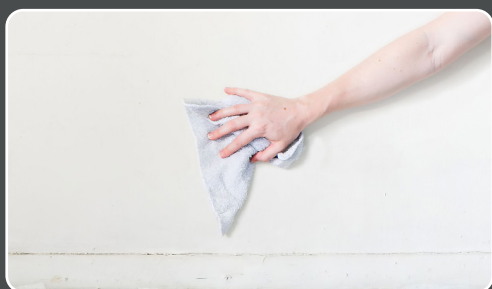

TECHNICAL DATA

<b>Appearance:</b> Liquid	<b>Drying Time:</b> Touch dry after 12 - 24 hours
<b>Viscosity:</b> 125-135 KU (25°C)	<b>Storage:</b> Store in dry places on wooden pallets
<b>Colour:</b> Reddish	<b>Flammability:</b> Non-flammable
<b>Density:</b> 1.62 ± 0,02 gr / cm3	<b>Application Temperature:</b> + 8°C to + 30°C
<b>Thinning:</b> 10% with water	<b>Consumption:</b> 4-5 m2 /kg
<b>pH of mixture:</b> 8 - 9	<b>Storage Time:</b> 12 months from the production date
<b>Packaging:</b> 20 kg	

